


# LS-108

## MILITARY PORTABLE LOUDSPEAKER

# MILITARY PORTABLE LOUDSPEAKER

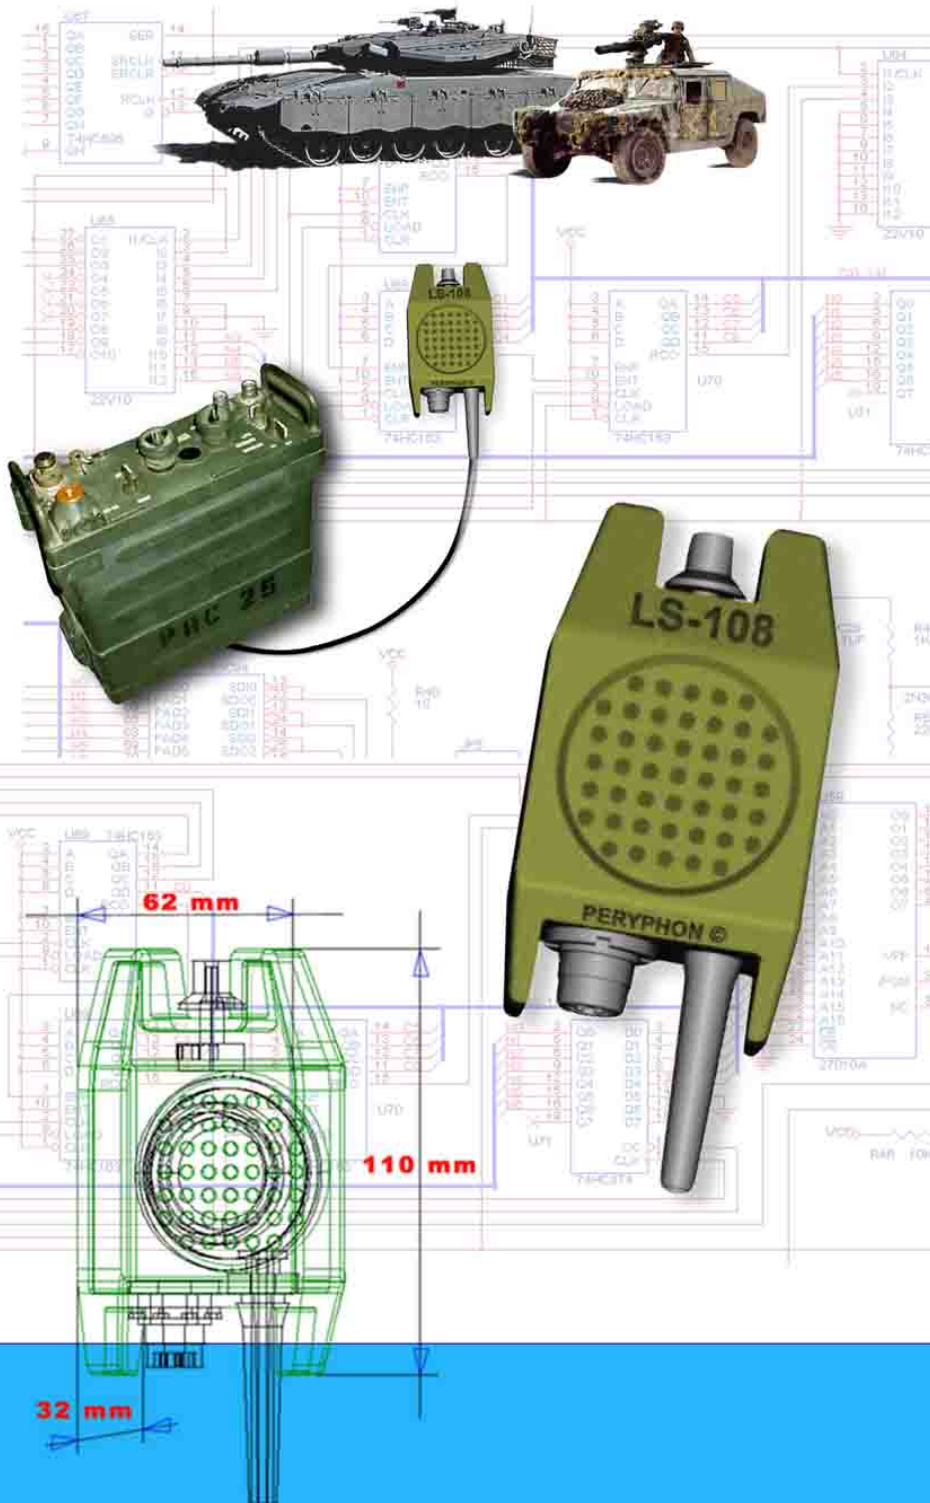

Loudspeaker **LS-108** is a two inch direct radiator, dynamic, permanent magnet type loudspeaker built in an armed housing, resistant to weather, water immersion, humidity, temperature extremes and bounce.

It is intended for use with ground, airborne and seaborne service.

Tactical equipment is mobile or fixed field communications equipment.

### Characteristics :

**Frequency Range :**  
300 Hz-7000 Hz.

**Power Rating :**  
2 Watts RMS (nominal) and 4 Watts RMS to peak.

**Input level :**  
The input level for the following requirements is 3.15 V RMS.

**Impedance :**  
The input impedance of the **LS-108** is between 40 and 54 Ohms.

**Attenuation :**  
The **LS-108** output is attenuated at no less than 30 dB when using the volume control.

**Temperature :**  
-30 to + 70 C

**Dimensions :**  
L = 110 mm; B = 62 mm;  
H = 32 mm.

**Net weight :**  
0.280 kg.

Hamelaca St .10 block 209  
New Industrial park  
Rosh-Hayin 48091 , Israel  
P.O.Box 13204 Tel-Aviv 61131  
Fax: 972 3 9025684  
Tel: 972 3 9025682

E-mail: [peryphton@zahav.net.il](mailto:peryphton@zahav.net.il)  
Internet: [www.peryphon.co.il](http://www.peryphon.co.il)