


# Military LAN Switch FSM-7328 -PR- DRC

8 port 10/ 100 MB + 2 opto GIGABIT Layer 3 lan switch. MIL-STD 1275B /461C-D-E/810E Compliant

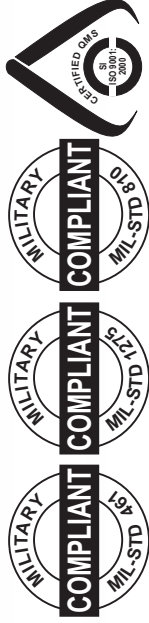

# FSM-7328

## Product Description:

The Military LAN Switch FSM7328 PR DRC is Managed Layer 3 Switch with 8x 10/100Mbps Ports and 2 Gigabit Optic Port (optional). Using D38999 Mil. standard connectors. The Military LAN Switch FSM7328 PR DRC is an important part in tactical communication system for use with ground, airborne and seaborne service. Dynamic Layer 3 switching ensures reliable routing between VLANs and network segmentation.

## Product Features:

Robust security features include IEEE 802.1x port-based authentication and access control lists, ensuring that only authorized users can access your network. Secure management of the switches is available through Secure Sockets Layer (SSLv3) for the Web GUI and Secured Shell (SSH) for command-line sessions.

## Technical Characteristics:

Data Link Protocol: Ethernet, Fast Ethernet, Auxiliary Network Remote Management Protocol: SNMP 1, RMON 1, RMON 2, RMON 3, RMON 9, Telnet, SNMP 3, SNMP 2c and more. HTTP Features: Flow control, Layer 3 switching, DHCP support, auto-negotiation, BOOTP support, VLAN support, auto-uplink, IGMP snooping, manageable, store and forward. Compliant Standards: IEEE 802.3, IEEE 802.3U, IEEE 802.1D, IEEE 802.1Q, IEEE 802.1p, IEEE 802.3x, IEEE 802.3ad (LACP), IEEE 802.1w, IEEE 802.1x, IEEE 802.1s and more.

VRAM: 128 MB

Flash Memory: 16 MB

Ports: Qty 8 or 16 (optional) x Ethernet 10Base-T, Ethernet 100Base-TX, 2x 10/100/1000Base-T/SFP (mini-GBIC)

Data Transfer Rate: 100 Mbps

## Power:

DC 18-32 - MIL-STD 704A-D/ MIL-STD 1275A-B /MIL-STD 461C-D-E Compliant

## MIL-STD Compliant:

Temperature operation/storage - MIL-STD 810E Compliant  
Vibration operation/storage - MIL-STD 810E Compliant  
Humidity operation/storage - MIL-STD 810E Compliant

## MIL-STD Connectors:

LAN Connectors - MIL-STD Compliant D38999 III 24W35SN  
Power Connector - MIL-STD Compliant  
RS-232 Connector - MIL-STD Compliant

## Physical and Environmental:

Size: L 19" H 2U

Temperature Operating: -15 C... +50 C

Storage: -40 C... +80 C



All right reserved. 1995-2008 © Peryphon Ltd ®  
10 Hamelacha St., block 209, New Industrial Park Rosh-Ha'ayin 48091 Israel  
TEL: 972-3-9025682 FAX: 972-3-9025684 E-mail: peryphton@zahav.net.il

# PERYPHON LTD

[http:// www.peryphton.co.il](http://www.peryphton.co.il)